




The LED Panels have brackets attached for surface mounting or for chain or wire suspension (chain or wire not supplied). These panels can also be fitted to a standard 15mm or 25mm suspended "T" grid ceiling.

- Voltage:** 85-265V AC
- Wattage:** 40w
- Lamp:** 360 SMD LED
- Lifetime:** 30,000 hours
- Chipset:** Bridgelux
- Material:** Aluminium Frame
Diffuser PMMA
Aluminium Back
- Extra Info:**
 - c/w driver.
 - Supplied with Removable Surface Mount Brackets
 - Individually wired LEDs to avoid 'dark spots'

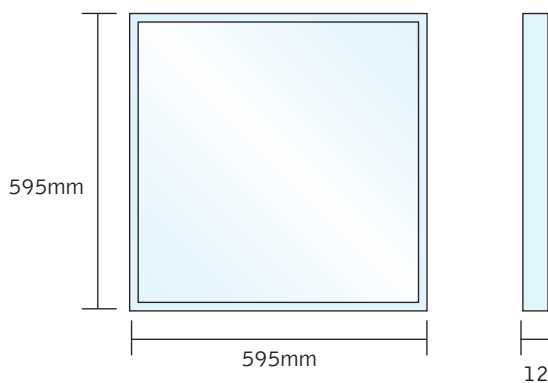

Models Available

MODEL	LUMEN OUTPUT	DESCRIPTION	COLOUR TEMP	DIMENSIONS (MM)		
				HEIGHT	WIDTH	DEPTH
LEDP40-64	2800lm	LED Panel Light c/w Driver	6400K (daylight)	595	595	12
LEDP40-41	2700lm	LED Panel Light c/w Driver	4100K (cool white)	595	595	12